
# Technical data

## Cayros mounted ploughs



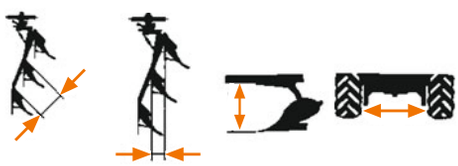


| Model | Body to body clearance (cm) | Furrow width (cm) | Beam height (cm) | Wheel track inner dimension (mm) | max. kW (hp) | Weight of the base machine (kg)* | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | 2 furrow | | 3 furrow | | 4 furrow | | 5 furrow | | 6 furrow | |
| Option | | | | | | | S | | S | | S | | S | | S |
| M 850 | 85 | 32/36/40/44 | 78 | 950 to 1,500 for S ploughs 1,150 to 1,700 | 88 (120) | – | 675 | – | 890 | – | 1105 | – | | – | |
| M 950 [2] | 95 | 36/40/44/48 | | | | 575 | 680 | 730 | 895 | 890 | 1110 | – | | – | |
| M 1020 | 102 | | | | | 580 | 685 | 735 | 900 | 895 | – | – | | – | |
| XM 850 | 85 | 32/36/40/44 | 78/82 for S ploughs 78 | 1,050–1,650 for S ploughs 1,250 to 1,850 | 103 (140) | – | | 860 | 1025 | 1005 | 1225 | – | | – | |
| XM 950 | 95 | 36 [1]/40/44/48 | | | | – | | 865 | 1030 | 1010 | 1230 | – | | – | |
| XM 1050 | 105 | | | | | – | | 870 | 1035 | 1015 | 1235 | – | | – | |
| XMS 850 | 85 | 32/36/40/44 | 78/82 | 1,050–1,650 for S ploughs 1,250 to 1,850 | 132 (180) | – | | 975 | 1140 | 1150 | 1370 | 1345 | 1620 | – | |
| XMS 950 | 95 | 36 [1]/40/44/48 | | | | – | | 980 | 1145 | 1160 | 1380 | 1360 | 1635 | – | |
| XMS 1050 | 105 | | | | | – | | 985 | 1150 | 1170 | 1390 | 1375 | – | – | |
| XS 850 | 85 | 36/40/44/48 | 82/90 for S ploughs 82 | 1,050–1,850 for S ploughs 1,250 to 2,050 | 205 (280) | – | | – | | – | 1540 | – | 1825 | – | 2100 |
| XS 950 | 95 | | | | | – | | – | | 1310 | 1565 | 1530 | 1845 | 1745 | 2115 |
| XS 1050 | 105 | 40/44/48 | | | | – | | – | | 1325 | 1580 | 1550 | 1865 | 1765 | 2130 |
| XS 1150 | 115 | | | | | – | | – | | 1340 | – | 1570 | – | – | – |
| XS pro 950 | 95 | 36/40/44/48 | 82/90 for S ploughs 82 | 1,050–1,850 for S ploughs 1,250 to 2,050 | 279 (380) | – | | – | | 1360 | 1615 | 1590 | 1905 | 1818 | 2185 |
| XS pro 1050 | 105 | | | | | – | | – | | 1375 | 1630 | 1610 | 1925 | 1835 | 2200 |
| XS pro 1150 | 115 | 40/44/48 | | | | – | | – | | 1390 | – | 1630 | – | – | – |

* Weight depends on beam height, plough bodies and optional equipment

[1] not possible for 1050-S variant (disc coulter in front of each body)

[2] also available as a V plough



## Cayros V mounted ploughs






kW/hp






| Model | Body to body clearance (cm) | Furrow width (cm) | Beam height (cm) | Wheel track inner dimension (mm) | max. kW (hp) | Weight of the base machine (kg)* | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | 3 furrow | | 4 furrow | | 5 furrow | | 6 furrow | |
| Option | | | | | | | VS | | VS | | VS | | VS |
| M 950 V | 95 | 32 – 52 | 78 | 950 to 1,500 for S ploughs 1,150 to 1,700 | 88 (120) | 800 | 965 | 975 | – | – | | – | |
| M 1020 V | 102 | | | | | 805 | 970 | 980 | – | – | | – | |
| XM 850 V | 85 | 32 – 52 | 78/82 for S ploughs 78 | 1,050 – 1,650 for S ploughs 1,250 to 1,850 | 103 (140) | 945 | 1110 | 1105 | 1325 | – | | – | |
| XM 950 V | 95 | | | | | 950 | 1115 | 1110 | 1330 | – | | – | |
| XM 1050 V | 105 | | | | | 955 | – | 1115 | – | – | | – | |
| XMS 850 V | 85 | 32 – 52 | 78/82 | 1,050 – 1,650 for S ploughs 1,150 to 1,850 | 132 (180) | 985 | 1270 | 1240 | 1530 | 1515 | 1810 | – | |
| XMS 950 V | 95 | | | | | 990 | 1280 | 1250 | 1540 | 1530 | 1825 | – | |
| XMS 1050 V | 105 | | | | | 995 | 1290 | 1260 | 1550 | 1545 | – | – | |
| XS 850 V | 85 | 32 – 55 | 82/90 for S ploughs 82 | 1,050 – 1,850 for S ploughs 1,250 to 2,050 | 205 (280) | – | | – | 1625 | – | 1965 | – | 2310 |
| XS 950 V | 95 | | | | | – | | 1380 | 1635 | 1650 | 1980 | 1905 | 2325 |
| XS 1050 V | 105 | | | | | – | | 1390 | 1645 | 1665 | 1995 | 1925 | – |
| XS 1150 V | 115 | | | | | – | | 1400 | – | 1680 | – | – | – |
| XS pro 950 V | 95 | 32 – 55 | 82/90 for S ploughs 82 | 1,050 – 1,850 for S ploughs 1,250 to 2,050 | 279 (380) | – | | 1740 | 1890 | 1940 | 2295 | 2190 | 2695 |
| XS pro 1050 V | 105 | | | | | – | | 1755 | 1905 | 1960 | 2315 | 2215 | – |
| XS pro 1150 V | 115 | | | | | – | | 1770 | – | 1980 | – | – | – |

* Weight depends on beam height, plough bodies and optional equipment

Illustrations, content and technical data are not binding and may differ depending on the level of equipment. Country-specific road traffic regulations apply and must be complied with, meaning that special approval may be required. The permissible axle loads and total weights of the tractor have to be checked. Not all the listed combination options are possible with all tractor manufacturers.